

Decks

Patios

Rooftops

Walkways

Golf Courses

Seniors'
Facilities

Apartments

The Rubber Surfacing Specialists

Cushion Walk® **PAVERS**

Get us under YOUR feet



www.dinoflex.com



DINOFLEX Manufacturing LTD.®



features
B E N E F I T S

Cushion Walk® **PAVERS**

INTERLOCKING
smooth & brick design

- INTERLOCKING & NON-INTERLOCKING
- SMOOTH OR BRICK DESIGN
- IMPACT ABSORBING
- SLIP RESISTANT
- DURABLE
- WATER PERMEABLE
- LOW MAINTENANCE
- NOISE REDUCING
- SPIKE RESISTANT
- STAIN RESISTANT
- QUALIFIES FOR LEED CREDITS



A STEP IN THE RIGHT DIRECTION





design

E X C E L L E N C E

DINOFLEX CushionWalk Pavers provide superior noise reduction and offer slip resistant surfacing for patios, decks, and walkways.

CushionWalk Pavers create a long-lasting, sustainable surface suitable for commercial and private facilities. Applications such as apartment complexes, condominiums, office buildings, schools, and hospitals benefit from these light-weight, well designed products.

Our interlocking, self-aligning tiles are easy to install and require no adhesive, making them ideal for installation over existing surfacing materials.

As a sustainable product manufactured from recycled materials, our CushionWalk Surfacing products qualify for LEED credits.

NON-INTERLOCKING
smooth & brick design




Get us under **YOUR** feet



color options




Black Terra Colta Red Pigment Forest Green Pigment Stone Beige Pigment Teak Brown Pigment

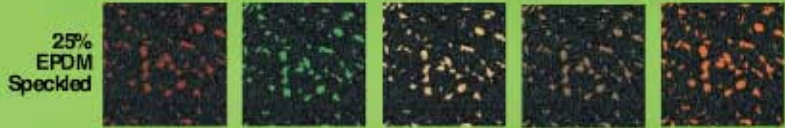

25% EPDM Speckled Red Green Beige Brown Orange



50% EPDM Speckled Red Green Beige Brown Orange

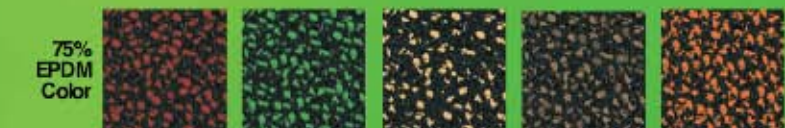

75% EPDM Color Red Green Beige Brown Orange

Colors shown are reproduced as closely as possible to actual product colors. Contact DINO FLEX for product samples.

specifications

	Non-Interlocking CushionWalk Paver	Interlocking CushionWalk Paver
Size	23 3/4" x 23 3/4" = 3.92 sq ft 60cm x 60cm = 0.36 m ²	24" x 24" = 4 sq ft 61cm x 61cm = 0.37 m ²
Thickness	3/4" 19mm	3/4" 19mm
Surface Design	Brick or Smooth	Brick or Smooth

5 YEAR WARRANTY

NOTE: All measurements are subject to nominal variation.

For complete specifications and technical data, please see our website at www.dinoflex.com

ADHESIVES




CX 941 Urethane
5 Gallon Pail
VOC Compliant



CX 941 Urethane
2 Gallon Pail
VOC Compliant



CX 948 Urethane
313 ML Gungrade
VOC Compliant



DINO FLEX Manufacturing LTD.®

THE RUBBER FLOORING SPECIALISTS

P.O. Box 3309
5590 - 46th Avenue S.E.
Salmon Arm, B.C.
V1E 4S1 CANADA

TEL (250) 832-7780
FAX (250) 832-7788
TOLL FREE TEL 1-877-713-1899
EMAIL sales@dinoflex.com

www.dinoflex.com



REPRESENTED BY:

DINO FLEX EUROPE

EUROPEAN DISTRIBUTOR OF DINO FLEX RUBBER FLOORING

Energiestraat 23a
NL-1411 AR Naarden
Tel: +31 (0)35-6782373
Fax: +31 (0)35-6782372
info@dinoflex.nl
www.dinoflex.nl

Get us under YOUR feet.